

00:22:11.9423560

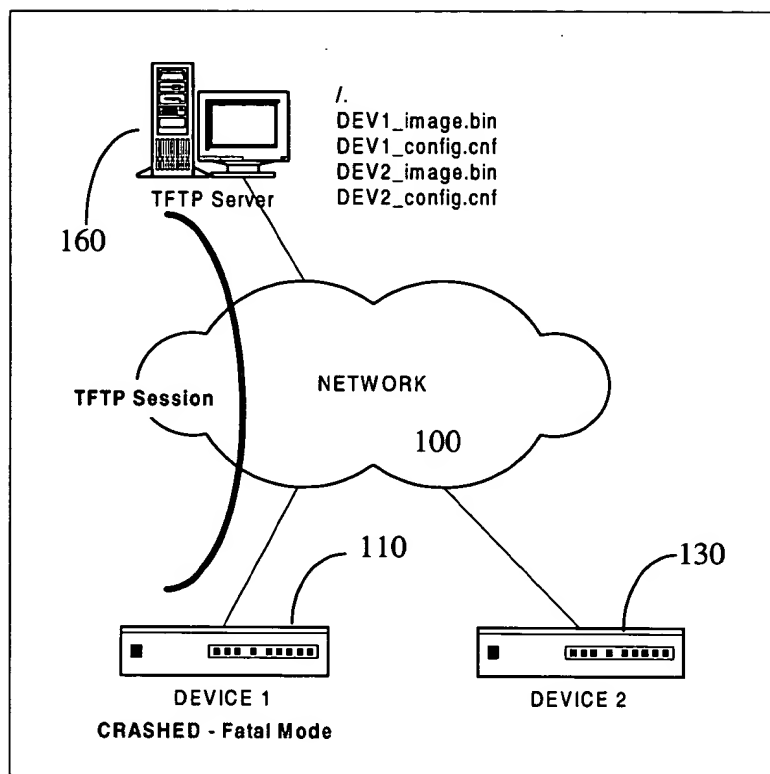


FIG. 1

The diagram illustrates a network-based recovery system. A central cloud labeled "NETWORK" (200) connects two TFTP servers and two devices. TFTP Server 1 (260) is on the left, and TFTP Server 2 (280) is on the right. Below the network are Device 1 (210) and Device 2 (230). Device 1 is labeled "DEVICE 1" and "CRASHED - Fatal Mode".

Files associated with TFTP Server 1 are:

- /DEV1\_image.bin
- /DEV1\_config.cnf
- /DEV2\_image.bin
- /DEV2\_config.cnf

Files associated with TFTP Server 2 are:

- /NEW\_image.bin
- /NEW\_config.cnf

Connections are shown as follows:

- A line from TFTP Server 1 to Device 1 is labeled "1st TFTP Session".
- A line from TFTP Server 2 to Device 1 is labeled "2nd TFTP Session".
- A line from TFTP Server 1 to Device 2 is labeled "2nd TFTP Session".
- A line from TFTP Server 2 to Device 2 is labeled "2nd TFTP Session".

**FIG. 2**

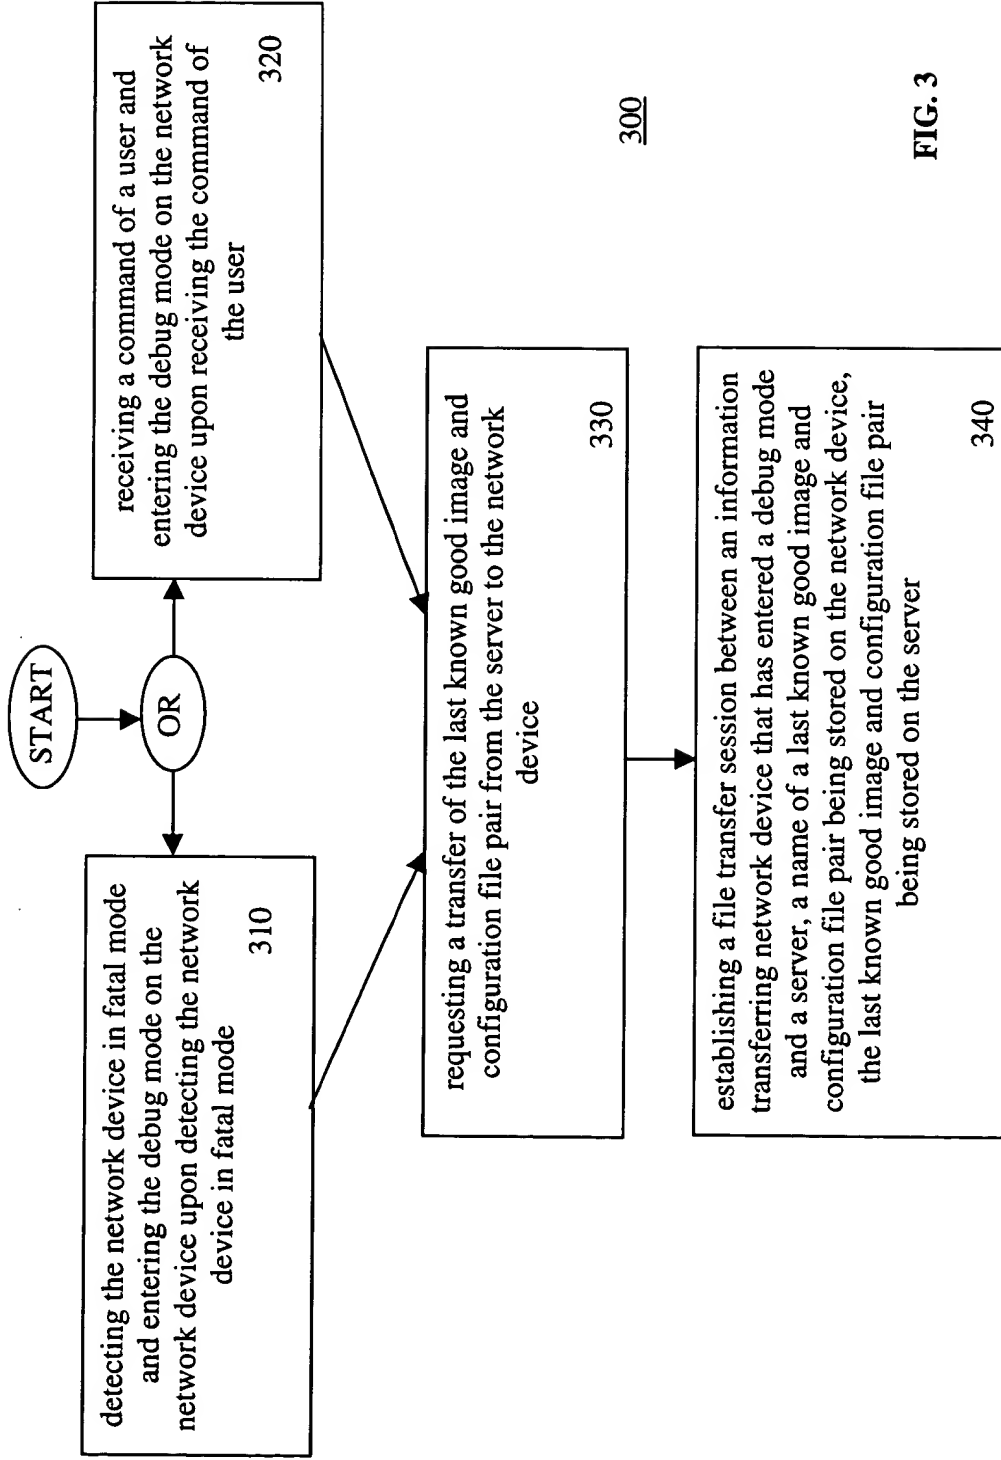


FIG. 3